





Anchor Application Guide

CarpetLOK™ anchors are efficient. At just 11% of intersections, they both align & secure every tile in the grid. For a lateral force in any direction, applied to any tile, a mechanical barrier in the form of a nearby CarpetLOK anchor restricts movement.

Anchors are 8' on center* in overlapping grids; 32 are used per 1,000 square feet*

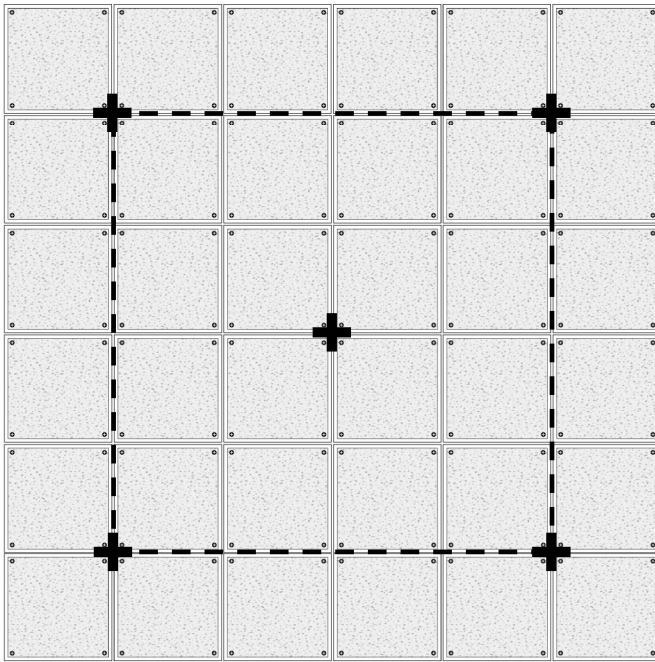

anchors create a "box" 8 feet square

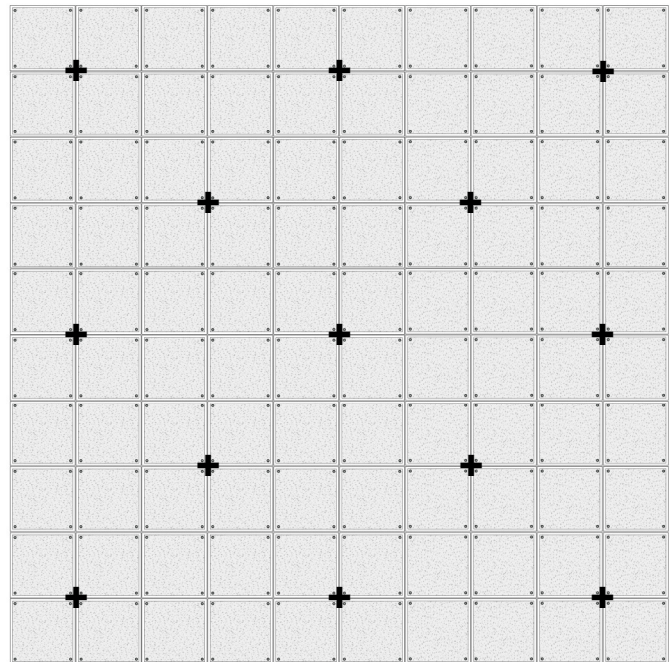

wide view shows the overall pattern

application rules:

1. Distance from perimeter anchors to walls may not exceed 4' (2 full panels)*.
2. Use adhesive tabs (e.g. TacTiles®) or releasable adhesive on all perimeter tiles.
3. Use adhesive tabs or releasable adhesive to secure cut tiles, in any location.
4. Use adhesive on inclined surfaces; follow carpet manufacturer's ramp instructions.
5. Extra anchors can be easily added at select locations, if indicated.

For assistance, ask your raised floor rep or write: support@CarpetLOK.com

Note: all carpet wears out, but anchors don't. Remember—only *CarpetLOK Certified* carpet tiles may be installed using anchors, as the system relies on the strength & consistency of tested, approved backing.

* Dimensions are nominal. Intersection % & anchors per unit area are approximate & vary with floor size, configuration, & ratio of perimeter walls to open space. 29 anchors cover about 100 square yards.